


RcppResultSet::add

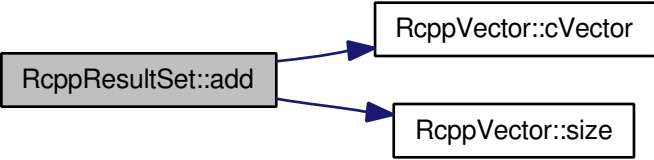

```
graph LR; A[RcppResultSet::add] --> B[RcppVector::cVector]; A --> C[RcppVector::size];
```

The diagram illustrates a function call from `RcppResultSet::add` to two other functions. A central box on the left, labeled `RcppResultSet::add`, has two arrows pointing to the right. The top arrow points to a box labeled `RcppVector::cVector`, and the bottom arrow points to a box labeled `RcppVector::size`. The boxes are arranged in a staggered fashion, with `RcppVector::cVector` positioned higher and further to the right than `RcppVector::size`.

RcppVector::cVector

RcppVector::size